

Electric cable hoist/Mini-electric cable hoists/Wall-mounted swivel arms

ESW 900 – Electric cable winch, compact and robust, with 12 V connection

- ▶ For use in vehicles, e.g., for pulling machines up a ramp into a small transporter
- ▶ Compact and robust
- ▶ Adjustable slip clutch protects the winch against overload

Model	ESW 900
Art. no.	6190900

Technical Data	
Pulling force	900 kg
Cable length	9 m
Cable thickness Ø	5.6 mm
Rated current	25 A
Output	300 W
Voltage	12 V DC
Pull speed	0.6 m/min
Length (housing)	390 mm
Width (without crank)	260 mm
Height (with carrying handle folded in)	185 mm
Degree of protection	IP 54
Weight	13 kg
Scope of supply	Remote control with cable connection



Typical application

MES Series – Mini electrical cable winches

- ▶ Dead-man switch for safe work
- ▶ Lifting height with/without deflection pulley 12 m/6 m
- ▶ Deflection pulley with load hook
- ▶ Fastened by means of two stable double-clamps
- ▶ Operating switch with IP54 degree of protection
- ▶ Limit switch for immediate shut-off at top and bottom limit positions

Model	MES 250-2	MES 600-2	MES 999-2
Art. no.	6198225	6198260	6198299

Technical Data			
Load lifting capacity with/without deflection pulley	125/250 kg	300/600 kg	500/999 kg
Connection	230 V ~50 Hz	230 V ~50 Hz	230 V ~50 Hz
Lifting height with/without deflection pulley	12/6 m	12/6 m	12/6 m
Max. lifting speed with/without deflection pulley	8 / 4 m/min	8 / 4 m/min	8 / 4 m/min
Cable diameter	3.0 mm	4.5 mm	6 mm
Weight	11 kg	17.5 kg	33 kg




MES 250-2

WSA-2 series – Wall-mounted swivel arm

- ▶ Matches electric cable hoists from the MES Series and others
- ▶ For fastening on rods or pipes
- ▶ Vertical bar not included in scope of supply (required tube diameter 48 mm)

Model	WSA 300-1100-2	WSA 600-750-2	WSA 1000-750-2
Art. no.	6198605	6198606	6198607

Technical Data			
Max. load-bearing capacity	300 kg	600 kg	1000 kg
Reach	1100 mm	750 mm	750 mm
Overall weight	8.4 kg	6.1 kg	9.3 kg
Distance between top and bottom suspension points	450 mm	380 mm	380 mm
For models	MES 250-2/600-2	MES 250-2/600-2	MES 999-2

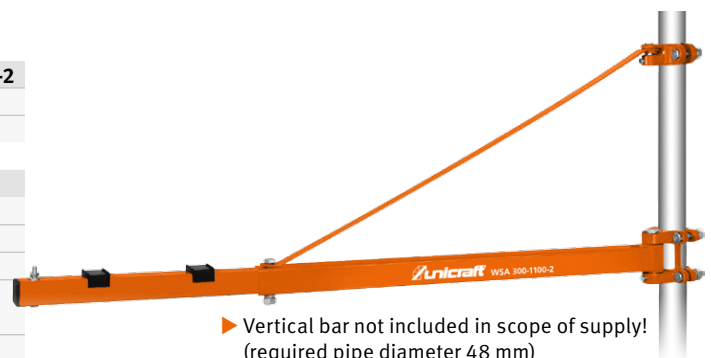

- ▶ Vertical bar not included in scope of supply! (required pipe diameter 48 mm)